





# SHINING 1300

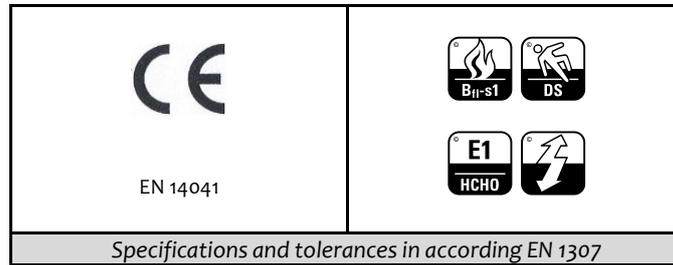

Specifications and tolerances in according EN 1307

Costruzione	Technique de fabrication	Construction	Herstellungsverfahren
Tufting velluto stampato 1/10"	Tufted velours imprimé 1/10"	Tufted cut pile print 1/10"	Getufted Druckvelours 1/10"
Composizione 100% poliammide 6.6	Composition du velours 100% polyamide 6.6	Pile composition 100% polyamid 6.6	Polnutzschicht 100% polyamid 6.6
Sottofondo Juta sintetica	Dossier Jute synthétique	Secondary backing Synthetic jute	Rückenausrüstung SDR Textilrucken
Punti al m <sup>2</sup> ± 304000	Touffes au m <sup>2</sup> ± 304000	Stitches per m <sup>2</sup> ± 304000	Knoten m <sup>2</sup> ± 304000
Altezza pelo ± 5.0 mm	Hauteur du velours ± 5.0 mm	Pile height ± 5.0 mm	Polhöhe ± 5.0 mm
Altezza totale ± 7.3 mm	Hauteur totale 7.3 mm	Total height ± 7.3 mm	Gesamthöhe ± 7.3 mm
Peso della fibra ± 1300 g/m <sup>2</sup>	Poids du velours ± 1300 g/m <sup>2</sup>	Yarn weight ± 1300 g/m <sup>2</sup>	Polgewicht ± 1300 g/m <sup>2</sup>
Peso totale ± 2340 g/m <sup>2</sup>	Poids total ± 2340 g/m <sup>2</sup>	Total weight ± 2340 g/m <sup>2</sup>	Gesamtgewicht ± 2340 g/m <sup>2</sup>
Larghezza rotolo 400 cm	Largeur du rouleau 400 cm	Roll width 400 cm	Breite 400 cm
Famiglia Tufting 1	Famiglia Tufting 1	Famiglia Tufting 1	Famiglia Tufting 1



Colour fastness to light	≥ 5	Thermal resistance m <sup>2</sup> K/W	≤ 0,17
Insulation impact noise ΔLw	32 dB	Body voltage walking test kV	≤ 2
Acoustical absorption α <sub>w</sub>	0,25		

RESISTENZA – WEARABILITY RESISTANCE - STRAPAZIERWERT				COMFORT – COMFORT CONFORT - KOMFORTWERT			
estrema extreme extrême extrem	elevata high élevée stark	normale good normale normal	sufficiente normal suffisante gering	medio medium moyen einfach	buono good bon gut	alto very good élevé hoch	ottimo excellent excellent luxuriös

Approved by Technique Management: M. Medica

Date: 21/10/2022

Pietro I&B. reserves the right to modify the characteristics of the product while keeping the same technical properties